

DL2700 Series

Electronic digital locks available in indoor and outdoor models



ALARM LOCK

Trilogy[®] F2 Series
by Alarm Lock

FEATURES

- Clutch mechanism insures long life & durability
- Programmable codes and functions include: Multi-level user capability; Master code, Manager code and up to 15 user codes – group and/or individual
- One-time emergency or service entrance code erases from memory after use
- Times entry allowance from 5-15 seconds
- Individual, group or total user lockout code
- Management can temporarily disable or permanently change any or all user codes
- Battery operated; uses 5 AA batteries
- Available in standard key override and interchangeable core models accepting 6 or 7 pin cores from Arrow, Best, Falcon or KSP. Other IC core preps available through special order
- Easy to install. Retrofits most cylindrical locksets & digital locks
- Available in standard Trilogy leverset (straight) or with new Regal (curved) handle trim, as show at right




Regal Handle Trim

WATERPROOF MODELS

- Dual water-sealed keypad, with silicon outerseal and mylar innerseal for extra protection
- Waterproof battery holder
- Completely encapsulated circuit board hermetically sealed against the elements
- Comprehensively tested to be rated for direct water exposure
- Operational temperature range of +151°F to -20°F (+66°C to -29°C)

(Note: all Trilogy models are available in WP waterproof and non-WP standard models for interior doors.)

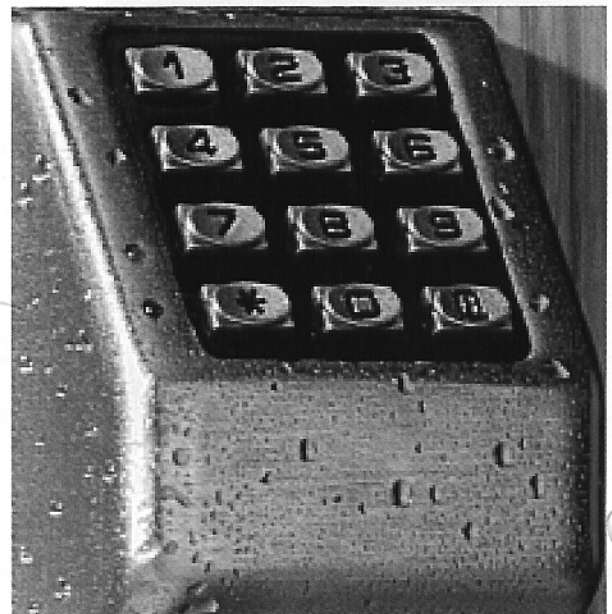

DL2700 Series Electronic digital locks available in indoor and outdoor models

Trilogy® T2 Series

by Alarm Lock

SPECIFICATIONS

OPERATION: Clutch mechanism permits turning lever without retracting latch and reduces stress on lock bodies and spindle. Outside lever free turning in locked position. Entering access code, key bypass, or remote bypass will allow lever to retract latch. Inside lever always instant egress.

DOOR THICKNESS: 1⁵/₈" to 1⁷/₈". Other thicknesses. Please consult factory.

BACKSET: 2³/₄" Standard. 2³/₈" backset also available.

KEYPAD: All metal, 12 button programmable for multi-level access functions including group or individual user codes, master and management codes, passage and emergency or service code, lockout and remote override capability and allowable entry time from 5 to 20 seconds.

STANDARD KEY OVERRIDE CYLINDERS: Solid brass 6 pin tumbler cylinder pinned 5, SC1 keyway, furnished in all locks. Additional tailpieces included: HW580 fits Schlage, Corbin/Russwin CL, Sargent 480 Series, ASSA65-611. Model HW620 fits Ilco and Lori cylinders.

INTERCHANGEABLE CORE MODELS: Accepts 6 & 7 Pin Cylinders from: Best, Arrow, KSP, Medeco Keymark & Kaba Peaks. Also available IC Core models for Yale, Medeco, Sargent, Corbin/Russwin CL and Schlage. *Alarm Lock Tailpiece is supplied; IC Core is not included.*

LATCHBOLT: UL Listed, fire rated, 3 hours, 1/2" throw, solid brass, deadlocking. Reversible. Adjustable front for flat or beveled doors.

STRIKE: 1¹/₈" x 2³/₄" T strike & 1¹/₄" x 4⁷/₈" ASA strike included. With screws for wood or metal jambs.

LATCH FRONT: 1¹/₈" x 2¹/₄" wrought brass or stainless steel.

HANDING: Non-handed.

FINISHES: US3 polished brass, US26D satin chrome, US26 polished chrome, US5 antique brass, 10B Duronodic (special order).

POWER: 5 AA alkaline batteries, supplied. Audible low battery alert, visual and audible entry indicators, unique Flex Drive[®] motor. 100,000 cycles typical.

DOOR PREP: Standard ANSI A115 Series Prep, modified by adding additional through-bolt holes.

COMPLIANCES: Grade I, heavy duty cylindrical lockset, UL listed and FCC certified.

