


4800 ELECTRIC STRIKE For Rim Panic Devices

DIMENSIONS

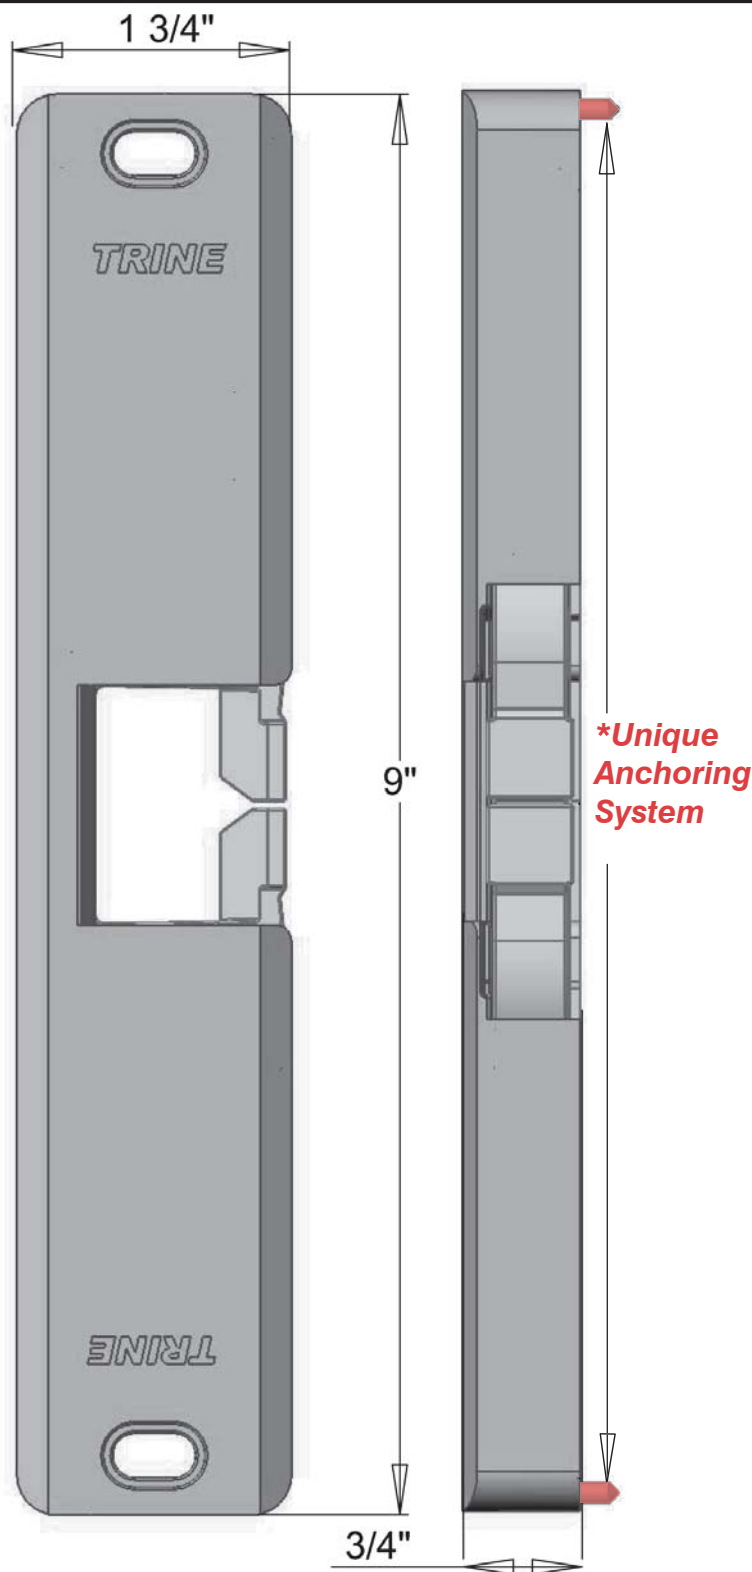

SPECIFICATION

SURFACE MOUNTING:

Unit only requires the drilling of (3) holes*

*ANCHORING SYSTEM: (Included)

Uniquely designed optional four pin anchoring system provides additional support beyond the standard two tapped mounting holes.

ONE PIECE LOCKING MECHANISM:

Our patent pending locking mechanism only has one mechanism providing incredible strength, durability and reliability due to fewer moving parts.

STAINLESS STEEL CONSTRUCTION

FAIL SECURE/FAIL SAFE FIELD SELECTABLE:

Unit is supplied with fail safe spring that is changed in the field when desired.

1,500,000+ LIFE CYCLE TESTED

3,000+ LBS. HOLDING FORCE

STEEL SPACER:

We supply a 1/8" thick spacer for those installations that require mounting the strike closer to the panic bar. In addition, the spacer is used as template during installation.

12 THRU 24 AC/DC OPERATING VOLTAGE:

Expanding the use of our popular LC unit in the 3000 series, the 4800 has this unit built in providing the flexibility along with surge and kickback protection.

VOLTAGE	PULL IN / HOLD AMPS	DUTY	SOUND
12DC	.566/.217	Intm./Cont.	Silent
24DC	.253/.099	Intm./Cont.	Silent
12AC	.509/.181	Intm./Cont.	Silent
16AC	.402/.149	Intm./Cont.	Silent
24AC	.215/.087	Intm./Cont.	Silent

AVAILABLE FINISHES

US3 - Bright Brass **US10B** - Dark Bronze
US4 - Satin Brass **US26** - Bright Chrome
US10 - Satin Bronze **US32D** - Satin Stainless Steel

PRICING

MODEL	FINISH	LIST \$
4800	32D	\$399.00
4800	All Other Finishes	\$459.00

HOW TO ORDER

Simply add the finish to the model number and your ready to buy: **EX: 4800-32D**